
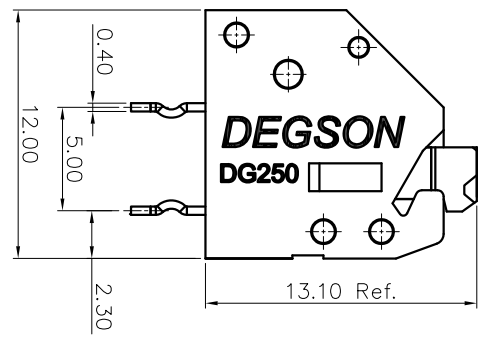


REVISION RECORD			
REV	ECN	DESCRIPTION	DRFT DATE

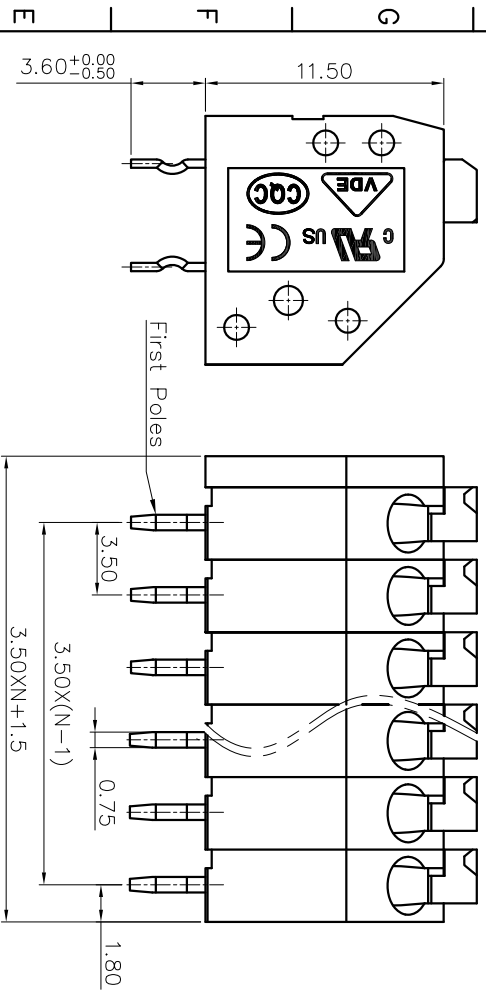

NOTES1:

- UL Standard
- Rated voltage/current : 300V/8A(B,D);150V/8A(C)
- Withstanding voltage : AC1600V/1Min.
- Wire range : 22~16AWG

IEC Standard

1. Pollution degree	3	2	2
Overvoltage category	III	III	II
Rate impulse voltage(KV)	4.0KV	4.0KV	4.0KV
Rate voltage(V)	320V	320V	630V
Rate current(A)	10A		



2. Wire range : 0.2~1.5mm²

NOTES2:

- 1.Dimension shall be interpreted per ASME Y14.5-2009
- 2.Pitch : 3.50mm, Poles : 02~XXP
- 3.Stripping length : 8.5~9.5mm
- 4.Operating temperature: -40°C~+105°C
- 5.Undimensioned tolerances:

Pitch Range	In	Nominal Dimension	Range	Out	Out
mm	mm	mm	mm	mm	mm
Over	6	10	30	60	100
TO	10	TO	TO	TO	150
6	10	24	30	60	100
±0.15	±0.25	±0.30	±0.50	±0.70	±1.00
					±1.30
					±2*

6.RoHS Compliance

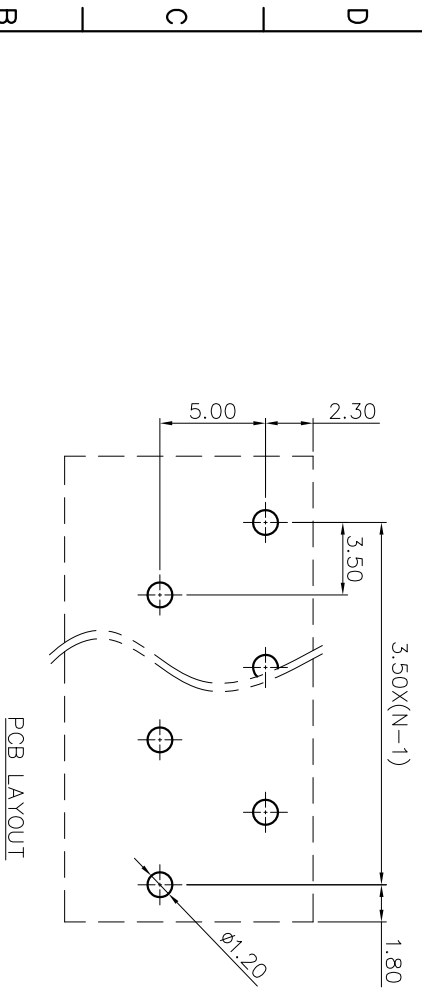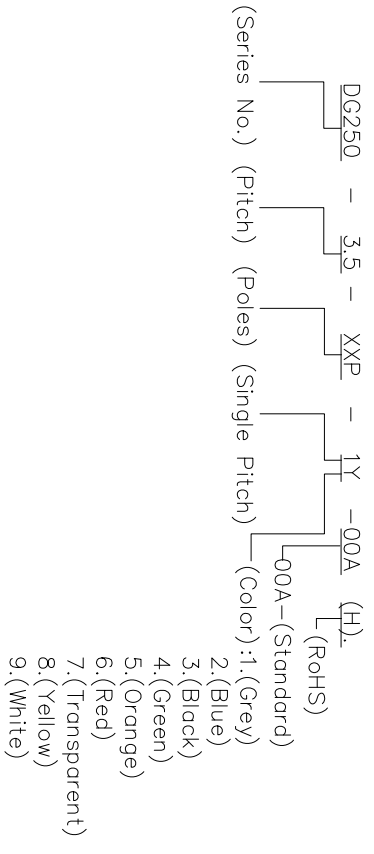

DETACHED LISTS	
PART NO.:	/
APPD:	/
CHKD:	/
DRFT:	/
THIRD ANGLE PROJECTION	
NAME:	DEGSON NINGBO DEGSON ELECTRICAL CO., LTD 宁波高松电子有限公司
TITLE:	CUSTOMER DRAWING
DRAWING NO.:	/
REV	DO
SHEET	1/1
SCALE	1:1