


IRON POWDER CORE SERIES PRODUCTS

E Type Cores


STANDARD SPECIFICATIONS

Part Number	A_L nH/N ²	A mm	B mm	C mm	D mm	F mm	G mm	Le cm	Ae cm ²	V cm ³	W cm ²
KE13-8	20.5	12.7	11.1	3.18	7.93	3.18	9.53	2.86	.101	.288	.252
KE13-18	29.0	12.7	11.1	3.18	7.93	3.18	9.53	2.86	.101	.288	.252
KE13-26	38.0	12.7	11.1	3.18	7.93	3.18	9.53	2.86	.101	.288	.252
KE13-52	38.0	12.7	11.1	3.18	7.93	3.18	9.53	2.86	.101	.288	.252
KE16-8	30.5	16.4	16.3	4.62	12.0	4.62	11.3	3.98	.224	.861	.399
KE16-26	58.0	16.4	16.3	4.62	12.0	4.62	11.3	3.98	.224	.861	.399
KE16-40	51.0	16.4	16.3	4.62	12.0	4.62	11.3	3.98	.224	.861	.399
KE16-52	56.0	16.4	16.3	4.62	12.0	4.62	11.3	3.98	.224	.861	.399
KE19-2	14.5	19.1	16.1	4.75	11.6	4.75	14.3	4.20	.226	.936	.551
KE19-8	33.5	19.1	16.1	4.75	11.6	4.75	14.3	4.20	.226	.936	.551
KE19-26	64.0	19.1	16.1	4.75	11.6	4.75	14.3	4.20	.226	.936	.551
KE19-28	27.5	19.1	16.1	4.75	11.6	4.75	14.3	4.20	.226	.936	.551
KE19-40	55.0	19.1	16.1	4.75	11.6	4.75	14.3	4.20	.226	.936	.551
KE19-52	59.0	19.1	16.1	4.75	11.6	4.75	14.3	4.20	.226	.936	.551
KE20-26	49.0	20.1	22.5	3.56	16.1	6.35	13.9	5.24	.225	1.18	.605
KE20-8A	38.0	20.2	19.9	5.84	14.0	5.84	14.6	4.84	.333	1.63	.613
KE20-26A	73.0	20.2	19.9	5.84	14.0	5.84	14.6	4.84	.333	1.63	.613
KE20-52A	73.0	20.2	19.9	5.84	14.0	5.84	14.6	4.84	.333	1.63	.613
KE25-8	51.0	25.4	25.4	7.29	17.5	7.29	17.7	6.08	.548	3.38	.908
KE25-26	96.0	25.4	25.4	7.29	17.5	7.29	17.7	6.08	.548	3.38	.908
KE25-52	96.0	25.4	25.4	7.29	17.5	7.29	17.7	6.08	.548	3.38	.908
KE25-2A	21.0	25.4	19.1	6.35	12.7	6.35	19.1	5.08	.403	2.05	.806
KE25-8A	48.0	25.4	19.1	6.35	12.7	6.35	19.1	5.08	.403	2.05	.806
KE25-18A	65.0	25.4	19.1	6.35	12.7	6.35	19.1	5.08	.403	2.05	.806
KE25-26A	92.0	25.4	19.1	6.35	12.7	6.35	19.1	5.08	.403	2.05	.806
KE25-40A	81.0	25.4	19.1	6.35	12.7	6.35	19.1	5.08	.403	2.05	.806

TECHNICAL INFORMATION & PHYSICAL CHARACTERISTICS

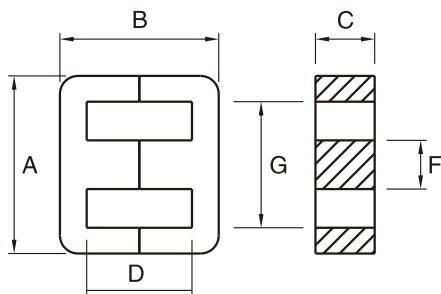

TYPICAL PART No.

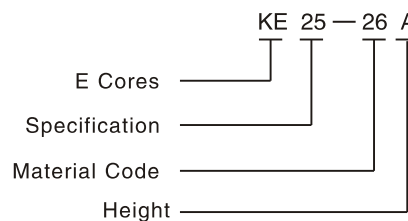

Le: Mean Magnetic Path Length
 Ae: Cross Section Area
 Ve: Core Volume